MOES
HOME, SMART MOES HOME

works with Tuya

Instruction Manual
Smart Curtain Switch Module
Model:WM-108-M

Wi-Fi

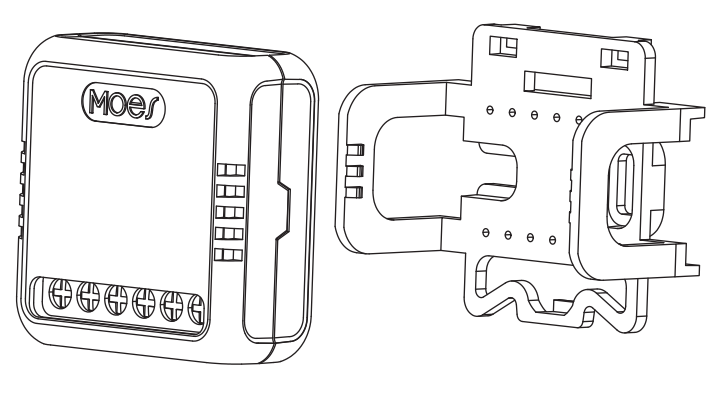

English

WORKS WITH alexa

WORKS WITH Google Assistant

WM-108-M-MS-DL11

- Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten
- Escanee el código QR para obtener el manual en español, el video de instalación y la introducción de la función
- Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions
- Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций
- Scansionare il codice QR per ottenere il manuale in italiano, il video di installazione e la guida alle funzionalita. Video di installazione e funzionalita
- Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções
- Zeskanuj kod QR, aby uzyskać instrukcje, filmy instalacyjne i funkcje
- QR コードをスキャンして、日本語のマニュアル、インストールビデオ、機能紹介を入手してください
- QR 코드를 스캔하면 한국어 설명서, 설치 동영상, 기능 가이드를 볼수 있습니다
- من فضلك قم بمسح رمز الاستجابة السريعه(QR-code)،للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف للوظائف

请扫描二维码获取中文的说明书、安装视频及功能介绍

Global international operation Whenever & Wherever You are, All-in-one Mobile App

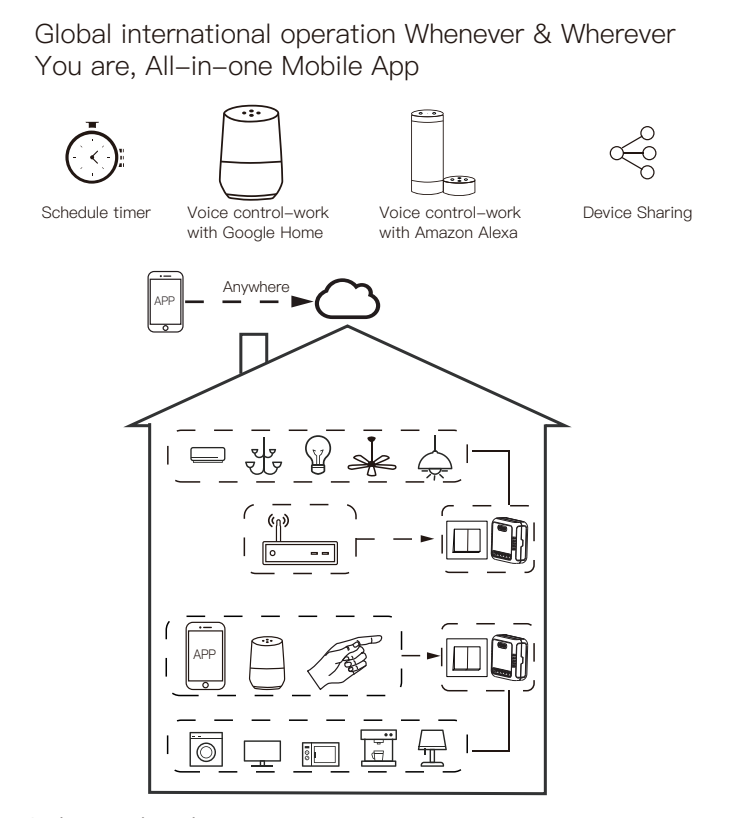

In house local operation

App / Router / Voice control / Rocker light switch / Push wall switch (Reset switch)

Push wall switch (Reset switch)

Rocker light switch

Step 1

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the circuit breaker is off before wiring.

ON OFF

Attention:
Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

Step 2

- Remove the old switch

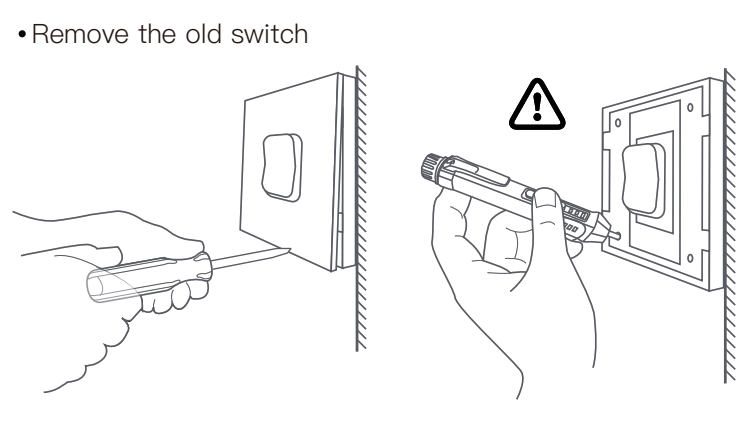

Step 3

- Remove the switch and pull it away from the wall. Identify Line/Load Wire(Note:The color of your wire may be different from the color shown on the manual.)

Verify power is off
- We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- You may need to turn off more than one circuit breaker.

Product introduction

WiFi smart curtain switch on-off is a smart home device, which combines WiFi wireless communication technology and the function of curtain switch on-off to realize the intelligent control of curtains. This device allows users to remotely control the opening and closing of curtains through mobile apps or voice commands, bringing great convenience and comfort.

Warnings:
1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of the reach of children.
3. Keep the device away from water , damp or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted in abnormal operation of the device.
5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble,repair or modify the device.

Package list

Smart Curtain Switch Module *1 User Manual *1
bracket *1

Smart Curtain Switch Module

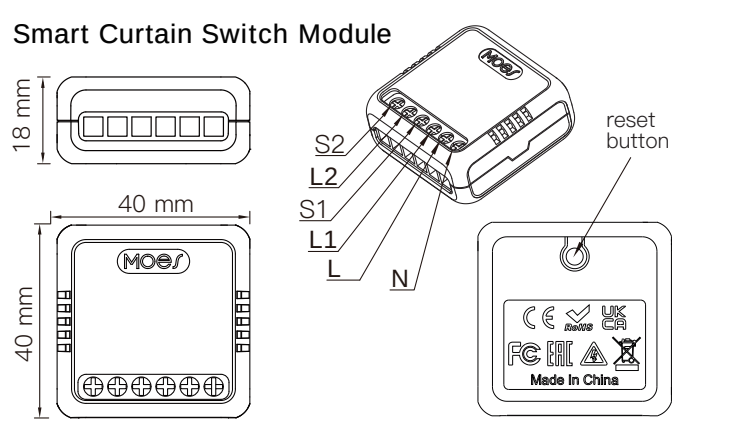

TECHNICAL SPECIFICATIONS

Model	WM-108-M
Product Type	Smart Curtain Switch Module
Voltage	90-250V AC 50/60Hz
Current	2.5A/Gang;Total 2.5A
Wireless Protocol	Wi-Fi、BLE
Operation Temp.	-10ºC ~ 65ºC
Case Temp.	Tc: +80ºC (Max.)
Operation Range	≤70 m
Dims (WxDxH)	40x40x18 mm
IP Rating	IP20
Frequency Band	2.412-2.484GHz
Maximum Radio Transmit Power	<+16dBm
RoHS Standard (RoHS)	2011/65/EU, (EU) 2015/683

WIRING DIAGRAM

1. With curtain switch



2. Without switch



Wiring Instructions and Diagrams
1.Turn off the power supply before carrying out any electrical installation work.
2.Connect wires according to the wiring diagram.
3.Insert the module into the junction box.
4.Connect the power supply and follow switch module configuration instructions.

Notes: Put your smartphone close to the switch module when you're configuring, and make sure you have min. 50% Wi-Fi signal.

Download the MOES APP

1. Download MOES App on App store or scan the QR code

GET IT ON Google play
Download on the App Store

MOES App is upgraded as much more compatibility than Tuya Smart/Smart Life App, functional well for scene controlled by Siri, widget and scene recommendations as the fully new customized service.
(**Note:** Tuya Smart/Smart Life App still works, but MOES App is highly recommended)

2. Registration or Log in.

- Download "MOES" Application.
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a MOES account.

3. Wi-Fi link method:(two pairing methods)

Method One:
Scan the QR code to configure the network guide.
1. Make sure your MOES APP has successfully connected to Wi-Fi

① ② ③ ④

Fit for the two switches

Rocker switch / Push wall switch (Reset switch)

Method two:
Pair and clear up the WiFi code with Bluetooth and WiFi connected meantime.

1.Make sure your phone is connected to Wi-Fi and Bluetooth.

BMW-08C7 / Bluetooth / Flashlight / Sound

2.Open MOES/Tuya App and Click"+", then the prompt page will automatically show on the screen. Click "add".

3.Enter Wi-Fi Password and click "Next",waiting for completing the connection.

4.Select the device you want to add and click "+"Add the device successfully, you can edit the name of the device to enter the device page by click "Done"

5. Click"Done"to enter the device page to enjoy your smart life with home automation.

How to reset /pair Wi-Fi code

a. For reset button:
Long press the reset button on the 6s module until the device indicator light flashes and the device enters the distribution network state

b. For rocker light switch:
Press the switch button 10 times (on/off cycle 5 times) until the device indicator light flashes for pairing and reset mode

c. For reset switch:
Press the switch button 10 times (with an interval of approximately 1 second or more each time) until the device indicator light flashes, entering pairing and reset mode

Control your home with your voice

Devices are compatible with Amazon Alexa and Google Home supported functionalities.
Please see our step-by-step guide on:
https://www.moestech.com/blogs/news/smart-device-linked-voice-speaker

Declaration of conformity

Hereby,WENZHOU NOVA NEW ENERGY CO.,LTD declares that the radio equipment type WM-108-M is in compliance with Directive 2014/53/EU,2014/35/EU, 2014/30/EU,2011/65/EU.
The full text of the EU declaration of conformity is available at the following internet address:
https://www.moestech.com/blogs/news/wm-108-m

Trouble shooting

If you have problems installing or operating your device, please review its product data sheet:
https://www.moestech.com/blogs/news/wm-108-m

WARRANTY INSTRUCTIONS

Dear Sir or Madam, thank you for purchasing the product.
We hope you'll enjoy using it.
The warranty for the products in the warranty card is hereby granted as follows.
As a condition of using the warranty, you must comply with the following terms and procedures:
1. Products are covered by a 24-month warranty, effective from the date of purchase of the covered product by a retail customer.
2. In order to exercise warranty rights, the purchaser must present: a) Warranty card, b) Proof of purchase (VAT invoice, financial receipt or other document confirming the actual date of purchase), unless the purchase date of the product comes from the warranty card.
3. If product quality problems occur within 24 months from the date of receipt, please prepare the product and packaging and go to the place or store where you purchased it to apply for after-sales maintenance. If the product is damaged due to personal reasons, a certain maintenance fee will be charged.
4. We recommend that you properly protect the goods when delivering them to the guarantor - for this purpose, we recommend that you use the original packaging with padding to ensure safe transportation. If you choose to use replacement packaging, we recommend that you ensure that the product is adequately protected from damage during shipping.

We recommend that you place an appropriate sticker on your packaging indicating the product's susceptibility to impact, such as "Warning Glass".
5. Reported defects covered by the warranty will be considered immediately and no later than 14 days from the date of delivery of the goods to the Guarantor.
6. After checking and determining the legality of the warranty claim, the Guarantor's services will repair the product within a reasonable time, not exceeding 30 days from the date of delivery of the goods to the Guarantor. However, if hard-to-find spare parts are required, this deadline may extend the time it takes to deliver the part from the manufacturer's factory.
7. The warranty does not include the performance of maintenance and similar operations specified in the user manual, and users are obliged to do it themselves.
8. If defects occur due to natural wear and tear during use, the warranty does not cover it.
9. The warranty does not cover:
a) Mechanical damage caused by the user's fault and product defects caused by such damage.
b) Damage caused by improper use of the product.
10. The rights under the guarantee will expire in the following circumstances:
a) Remove the warranty seal from the product.
b) Remove the serial number from the product.
c) Take action to eliminate physical defects in the product outside of authorized service.
d) Use non-original parts and consumables.

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

FR Cet appareil, ses accessoires, se recyclent — À DÉPOSER EN MAGASIN ou À DÉPOSER EN DÉCHÈTERIE

WARRANTY CARD

Product Information

Product Name________
Product Type________
Purchase Date________
Warranty Period________
Dealer Information________
Customer's Name________
Customer Phone________
Customer Address________

Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

Thank you for your support and purchase at we Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.

★ ★ ★ ★ ★

If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

FOLLOW US

@moessmart MOES.Official
@moes_smart @moes_smart
@moes_smart www.moes.net

UK REP EVATOST CONSULTING LTD
Address: Suite 11, First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR
Tel: +44-292-1680945
Email: contact@evatmaster.com

EC REP AMZLAB GmbH
Laubenhof 23, ESSEN 45326
Email: info@amz-lab.de
Tel: +491745298066
Made In China

Manufacturer:
WENZHOU NOVA NEW ENERGY CO.,LTD
Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China
Tel: +86-577-57186815
After-sale Service: service@moeshouse.com

Gebrauchsanweisung
(Deutsch)

Schritt 1

- Schalten Sie den Schutzschalter aus und verwenden Sie den Stromtester, um den Strom zu prüfen.
- Vergewissern Sie sich vor der Verkabelung, dass der Schutzschalter ausgeschaltet ist.

ON AUS

Achtung!
Bitte unterbrechen Sie die Stromversorgung, bevor Sie das Gerät installieren oder entfernen, um irreversible Schäden am ...

Schritt 3

- Nehmen Sie den Schalter ab und ziehen Sie ihn von der Wand weg.
Identifizieren Sie das Netz-/Lastkabel (Hinweis: Die Farbe Ihres Kabels kann sich von der in der Anleitung angegebenen Farbe unterscheiden).

Prüfen Sie, ob der Strom ausgeschaltet ist.
- Wir empfehlen Ihnen, die Frontplatte des alten Schalters zu entfernen und alle mit dem Schalter verbundenen Drähte mit einem elektrischen Prüfgerät zu testen, um sicherzustellen, dass keine Spannung im Stromkreis vorhanden ist.
- Möglicherweise müssen Sie mehr als einen Schutzschalter ausschalten.

Warnungen:
1. Die Installation muss von einem qualifizierten Elektriker in Übereinstimmung mit den örtlichen Vorschriften durchgeführt werden.

Smart Curtain Switch Modul

WIRKDIAGRAMM

2. Ohne Schalter

Laden Sie die MOES APP herunter

Die MOES App ist viel kompatibler als die Tuya Smart/Smart Life App und funktioniert auch für die Steuerung von Szenen durch Siri, Widgets und Szenenempfehlungen als völlig neuer kundenspezifischer Service.
(**Hinweis**: Tuya Smart/Smart Life App funktioniert noch, aber MOES App ist sehr empfehlenswert)

2. Registrierung oder Anmeldung.
- Laden Sie die Anwendung "MOES" herunter.
- Rufen Sie die Schnittstelle "Registrieren/Anmelden" auf; tippen Sie auf "Registrieren", um ein Konto zu erstellen, indem Sie Ihre Telefonnummer eingeben, um einen Verifizierungscode zu erhalten, und "Passwort festlegen". Wählen Sie "Anmelden", wenn Sie ...

Wenn Sie das Gerät erfolgreich hinzugefügt haben, können Sie den Namen des Geräts bearbeiten und die Geräteseite aufrufen, indem Sie auf "Fertig" klicken.

5. Klicken Sie auf "Fertig", um die Geräteseite aufzurufen und Ihr intelligentes Leben mit Hausautomation zu genießen.

GARANTIEHINWEISE

Sehr geehrte Damen und Herren, vielen Dank für den Kauf des Produkts.
Wir hoffen, dass Sie es gerne verwenden.
Die Garantie für die Produkte in der Garantiekarte wird wie folgt gewährt.
Als Voraussetzung für die Inanspruchnahme der Garantie müssen Sie die folgenden Bedingungen und Verfahren einhalten:
1. Für die Produkte gilt eine 24-monatige Garantie, gültig ab dem Kaufdatum des abgedeckten Produkts durch einen Einzelhandelskunden.
2. Um Garantierechte geltend zu machen, muss der Käufer Folgendes vorlegen: a) Garantiekarte,b) Kaufbeleg (Mehrwertsteuerrechnung, Zahlungsbeleg oder anderes Dokument, das das tatsächliche ...